

Standby & Prime: 60Hz



Image shown might not reflect actual configuration

| | |
|-----------------------|---|
| Engine Model | Cat® C15 ACERT™ In-line 6, 4-cycle diesel |
| Bore x Stroke | 137mm x 171mm (5.4in x 6.8in) |
| Displacement | 15.2 L (928 in³) |
| Compression Ratio | 16.1:1 |
| Aspiration | Turbocharged Air-to-Air Aftercooled |
| Fuel Injection System | MEUI |
| Governor | Electronic ADEM™ A4 |


| Model | Standby | Prime | Emission Strategy |
|---------|------------------|------------------|-------------------------|
| DE500E0 | 500 kVA, 400 ekW | 450 kVA, 360 ekW | Non-Certified Emissions |

PACKAGE PERFORMANCE

| Performance | Standby | Prime |
|---|-------------------------|---------------|
| Frequency | 50 Hz | |
| Genset Power Rating | 500 kVA | 450 kVA |
| Genset power rating with fan @ 0.8 power factor | 400 ekW | 360 ekW |
| Emissions | Non-Certified Emissions | |
| Performance Number | DM8491 | DM8490 |
| Fuel Consumption | | |
| 100% load with fan, L/hr (gal/hr) | 103.7 (27.4) | 94.5 (25.0) |
| 75% load with fan, L/hr (gal/hr) | 77.9 (20.6) | 71.8 (19.0) |
| 50% load with fan, L/hr (gal/hr) | 55.3 (14.6) | 51.5 (13.6) |
| 25% load with fan, L/hr (gal/hr) | 33.4 (8.8) | 31.6 (8.3) |
| Cooling System¹ | | |
| Radiator air flow restriction (system), kPa (in. Water) | 0.12 (0.48) | 0.12 (0.48) |
| Radiator air flow, m³/min (cfm) | 476 (16809) | 476 (16809) |
| Engine coolant capacity, L (gal) | 20.8 (5.5) | 20.8 (5.5) |
| Radiator coolant capacity, L (gal) | 37 (9.7) | 37 (9.7) |
| Total coolant capacity, L (gal) | 57.8 (15.2) | 57.8 (15.2) |
| Inlet Air | | |
| Combustion air inlet flow rate, m³/min (cfm) | 29.3 (1036.4) | 27.3 (965.0) |
| Max. Allowable Combustion Air Inlet Temp, °C (°F) | 48 (118) | 46 (114) |
| Exhaust System | | |
| Exhaust stack gas temperature, °C (°F) | 523.6 (974.4) | 515.3 (959.5) |
| Exhaust gas flow rate, m³/min (cfm) | 79.4 (2802.2) | 73.1 (2580.2) |
| Exhaust system backpressure (maximum allowable) kPa (in. water) | 10.0 (40.0) | 10.0 (40.0) |
| Heat Rejection | | |
| Heat rejection to jacket water, kW (Btu/min) | 151 (8583) | 139 (7923) |
| Heat rejection to exhaust (total) kW (Btu/min) | 377 (21425) | 344 (19561) |
| Heat rejection to aftercooler, kW (Btu/min) | 71 (4053) | 61 (3450) |
| Heat rejection to atmosphere from engine, kW (Btu/min) | 44 (2477) | 42 (2396) |

| Emissions (Nominal) ² | Standby | Prime | |
|---|----------------------------|----------------------------|----------------------------|
| NOx, mg/Nm ³ (g/hp-hr) | 3458.8 (6.8) | 3357.6 (6.6) | |
| CO, mg/Nm ³ (g/hp-hr) | 171.2 (0.3) | 159.3 (0.3) | |
| HC, mg/Nm ³ (g/hp-hr) | 5.2 (0.0) | 6.6 (0.0) | |
| PM, mg/Nm ³ (g/hp-hr) | 7.8 (0.0) | 8.8 (0.0) | |
| Alternator ³ | | | |
| Voltages | 415V | 400V | 380V |
| Motor starting capability @ 30% Voltage Dip | 1439 skVA | 1066 skVA | 1207 skVA |
| Current | Standby: 695A, Prime: 626A | Standby: 722A, Prime: 650A | Standby: 747A, Prime: 650A |
| Frame Size | A2975L4 | A2975L4 | A2975L4 |
| Excitation | SE | SE | SE |
| Temperature Rise | SB:163°C, PP: 125°C | SB:163°C, PP: 125°C | SB:163°C, PP: 125°C |

WEIGHTS & DIMENSIONS

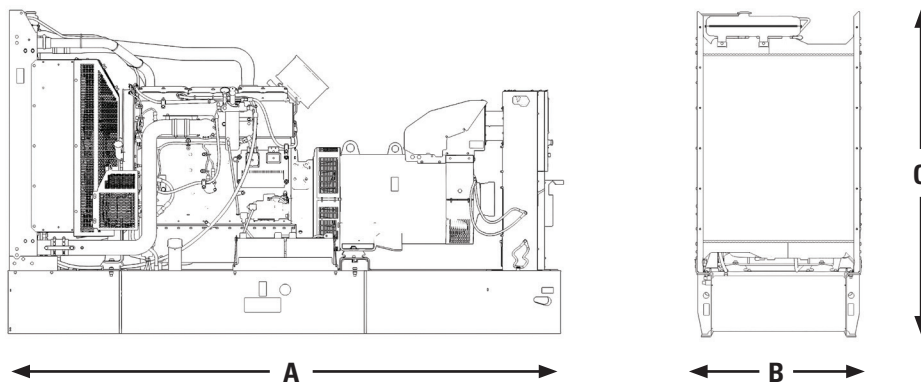

Note: General configuration not to be used for installation. See general dimension drawings for detail.

| Dim "A" mm (in) | Dim "B" mm (in) | Dim "C" mm (in) | Dry Weight kg (lb) |
|-----------------|-----------------|-----------------|--------------------|
| 3830 (151) | 1130 (44) | 2255 (89) | 3700 (8157) |

APPLICABLE CODES AND STANDARDS:

AS1359, CSA C22.2 No100-04, UL142, UL489, UL869, UL2200, NFPA37, NFPA70, NFPA99, NFPA110, IBC, IEC60034-1, ISO3046, ISO8528, NEMA MG1-22, NEMA MG1-33, 2006/95/EC, 2006/42/EC, 2004/108/EC.

Note: Codes may not be available in all model configurations. Please consult your local Cat Dealer representative for availability.

STANDBY: Output available with varying load for the duration of the interruption of the normal source power. Average power output is 70% of the standby power rating. Typical operation is 200 hours per year, with maximum expected usage of 500 hours per year.

PRIME: Output available with varying load for an unlimited time. Average power output is 70% of the prime power rating. Typical peak demand is 100% of prime rated kW with 10% overload capability for emergency use for a maximum of 1 hour in 12. Overload operation cannot exceed 25 hours per year

RATINGS: Ratings are based on SAE J1349 standard conditions. These ratings also apply at ISO3046 standard conditions.

DEFINITIONS AND CONDITIONS

¹ For ambient and altitude capabilities consult your Cat dealer. Air flow restriction (system) is added to existing restriction from factory.

² Emissions data measurement procedures are consistent with those described in EPA CFR 40 Part 89, Subpart D & E and ISO8178-1 for measuring HC, CO, PM, NOx. Data shown is based on steady state operating conditions of 77° F, 28.42 in HG and number 2 diesel fuel with 35° API and LHV of 18,390 BTU/lb. The nominal emissions data shown is subject to instrumentation, measurement, facility and engine to engine variations. Emissions data is based on 100% load and thus cannot be used to compare to EPA regulations which use values based on a weighted cycle.

³ UL 2200 Listed packages may have oversized generators with a different temperature rise and motor starting characteristics. Generator temperature rise is based on a 40° C ambient per NEMA MG1-32.

LET'S DO THE WORK.™